

First Semester B.E./B.Tech. Degree Examination, Dec.2025/Jan.2026
Programming in C

Time: 3 hrs.

Max. Marks: 100

*Note: 1. Answer any FIVE full questions, choosing ONE full question from each module.
 2. M : Marks , L: Bloom's level , C: Course outcomes.*

Module - 1			M	L	C
Q.1	a.	Define C. Explain the HISTORY of C.	5	L2	CO1
	b.	Explain the System development life cycle.	5	L2	CO1
	c.	Explain the General form of a C program with example.	5	L2	CO1
	d.	Explain the steps in Compiling a C Program. With suitable Example.	5	L2	CO1
OR					
Q.2	a.	Define data type. Explain primitive data types supported in C language with example.	5	L2	CO1
	b.	Define Operators. Explain the Increment and Decrement operators with suitable Examples.	5	L2	CO1
	c.	Show the evaluation of the following expressions with intermediate and final values. i) $x = a - b/3 + c * 2 - 1$ when $a = 9, b = 12, c = 3$ $10! = 10 5 < 4 \ \&\& \ 8.$	5	L2	CO1
	d.	Develop a C program to multiply, subtract and division by taking two whole numbers. Choose suitable data types for variables.	5	L3	CO5
Module - 2					
Q.3	a.	Explain the Reading and Writing characters.	5	L2	CO2
	b.	With a suitable example, Explain formatted input and output statements.	5	L2	CO1
	c.	List the conditional branching statements in 'C'. Explain any two with suitable examples.	5	L2	CO2
	d.	Develop a C program to print Floyd's triangle for N rows ($N > 0$). Choose suitable control statements. [form=4] 1 23 456 78910	5	L3	CO5
OR					

Q.4	a.	Explain the Iteration Statements with suitable Examples.	5	L2	
	b.	Explain the role of break and continue statements in C with suitable examples.	5	L2	CO2
	c.	Explain the go to , return and Block Statements in C with suitable examples.	5	L2	CO2
	d.	Develop a program to find the roots of quadratic equations.	5	L3	CO5

Module - 3

Q.5	a.	Define an array. How a single dimension and two-dimensional arrays are declared and initialized? Illustrate with suitable examples.	5	L2	CO2
	b.	Explain how arrays are passed to Functions.	5	L2	CO2
	c.	Define variable length array. Illustrate how variable length array is different from static array.	5	L2	CO2
	d.	Develop a C Program to find the Transpose of MATRIX.	5	L3	CO2

OR

Q.6	a.	Define a pointer. How do you declare and initialize pointer in C. Explain accessing array elements using a pointer.	5	L2	CO2
	b.	Explain any two pointers operators and pointer Expressions with suitable Examples.	5	L2	CO2
	c.	Explain the concept of Multiple Indirection in Pointers	5	L2	CO2
	d.	Develop a C program to add two numbers using pointers to the variables.	5	L3	CO2

Module - 4

Q.7	a.	Define function. Explain the syntax of function definition and function declaration with a simple example.	5	L2	CO2
	b.	Explain the Function Arguments and Return statements in C.	5	L2	CO2
	c.	Explain the Function Prototypes with suitable Examples.	5	L2	CO2
	d.	Define recursion. Develop a C program and a function to compute factorial of a given number using recursion.	5	L3	CO2

OR

Q.8	a.	Define Dynamic memory allocation. List and explain the different functions to handle dynamic memory allocation in C.	5	L2	CO2
	b.	List the advantages of functions in programming.	5	L2	CC
	c.	Explain TWO techniques of parameter passing to functions with suitable program segments.	5	L2	CC

	d.	Develop a C-program and a function to check whether the given number is Prime or not.	5	L3	CO3
Module - 5					
Q.9	a.	Define a structure in C. Explain the different types of structure declarations with examples.	5	L2	CO4
	b.	Explain how Array of Structures is passed to a function.	5	L2	CO4
	c.	Explain the differences between structures and unions.	5	L2	CO4
	d.	Develop a C program to store and display the Employee details using Structures.	5	L3	CO5
OR					
Q.10	a.	Describe a method to compare two structure variables of the same type, and provide a simple example.	5	L2	CO4
	b.	Define Enumerated data type. Explain the declaration and access of enumerated data types with the help of C program segment.	5	L2	CO4
	c.	What are Bit-fields and typedef in C. Explain with example.	5	L2	CO4
	d.	Develop a C program to access and modify the members of structures, in array of structures in C.	5	L3	CO5

Programming in C

Model-1


Q.1)

a) Define C. Explain history of C.

-5M


A: C is a general purpose, procedural computer programming language developed by Dennis Ritchie at Bell lab in the early 1970's.

History of C

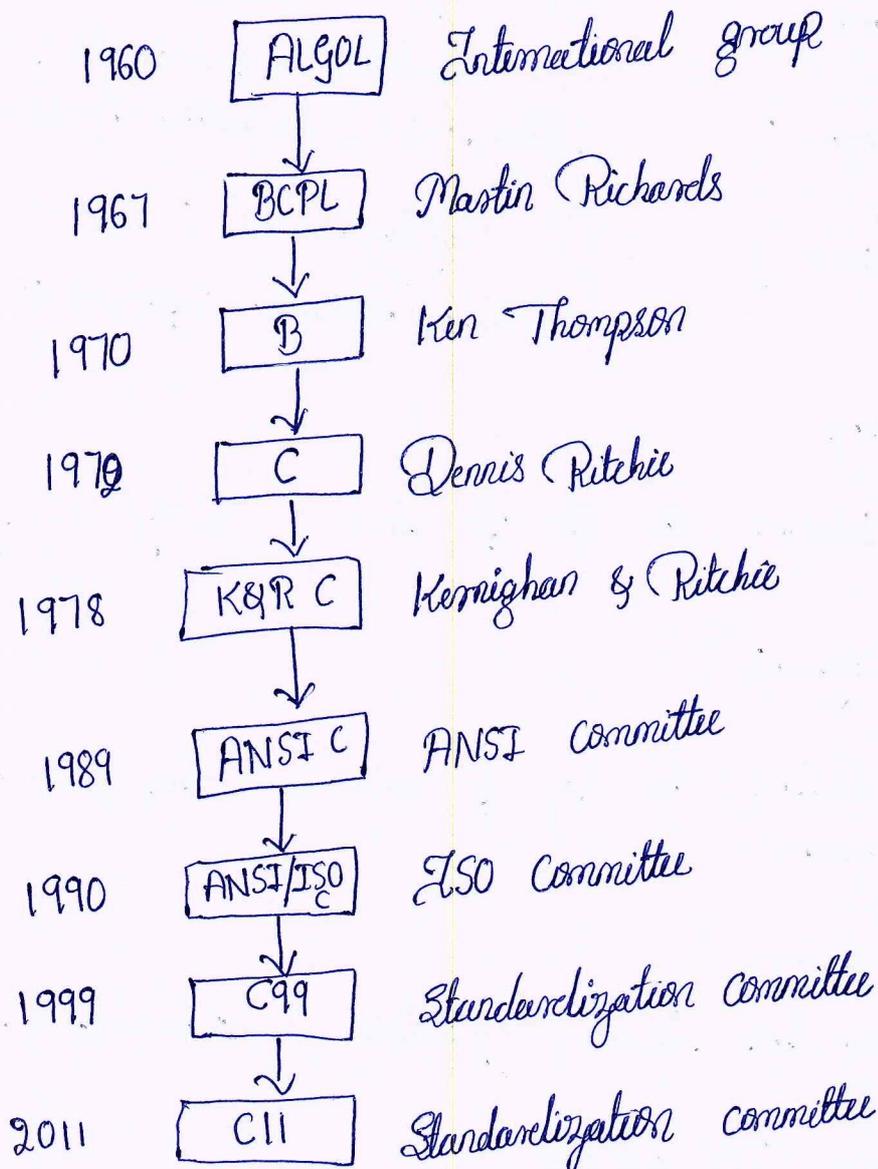

b) Explain System Development life cycle

A:

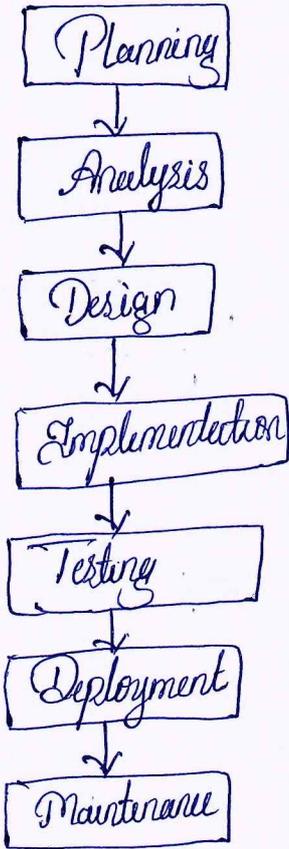

1) Planning :

Defining Project scope, goals, resources & cost.

2) Analysis :

Gathering detailed functional requirements from Stakeholders.

3) System Design :

Translating requirements into a technical blue print, including hardware & s/w architecture.

4) Implementation :

Building ^{the} actual software or s/w components.

5) Testing :

Validating the s/w for bugs, security & functionality.

6) Deployment :

Installing the s/w for user, including training & data migration.

7) Maintenance :

Correcting issues, updating & enhancing the s/w.

Common SDLC models

* Waterfall

* Agile

* V-Model.

C) Explain general form of a C program with example.

A:

```
// Short info of this pgm &  
other info
```

 → Documentation Section

```
#include <stdio.h>  
#include <conio.h>
```

 → Link/File Inclusion Section

```
#define PI 3.14
```

 → Definition Section

```
void add ();  
int x = 100;
```

 → Global declaration Section

```
int main ()  
{  
    int a = 10;  
    :  
    a = a + 10;  
}
```

 → main () function Section

```
void add ()
```

 → Sub program section

Example :-

```
// Documentation
```

```
/**
```

```
* file : sum.c
```

```
* Description : Program to find sum */
```

```
#include <stdio.h>
```

```
#define X 20
```

```
int sum(int y)
```

```
int main(void)
```

```
{
```

```
int y = 55;
```

```
printf("sum : %d", sum(y));
```

```
return 0;
```

```
}
```

```
int sum(int y)
```

```
{
```

```
return y+x
```


```
}
```

Output :

Sum: 75

d) Explain Steps in compiling C program with suitable example.

A:

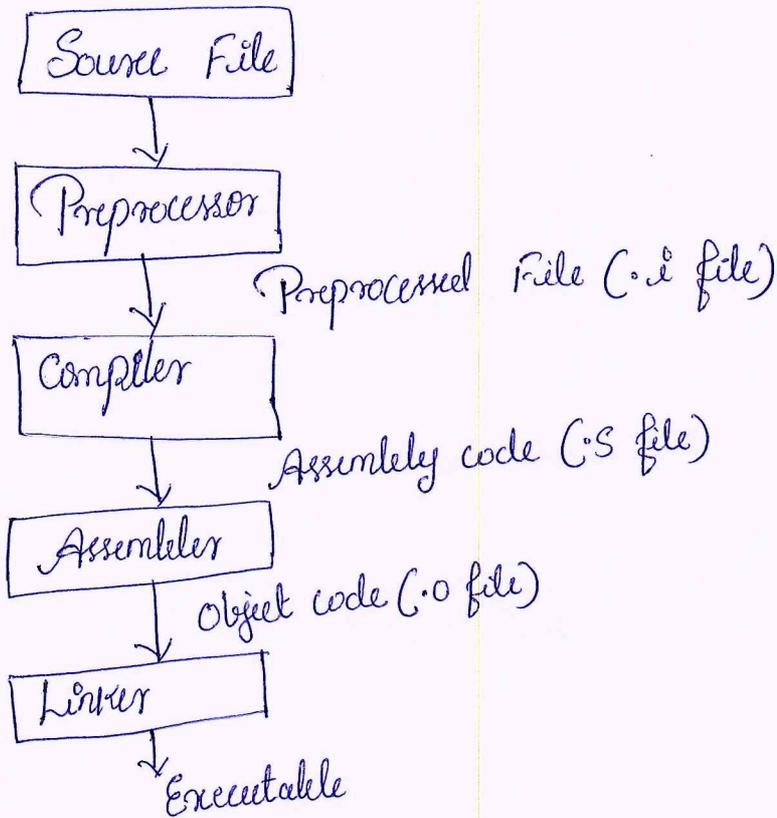

1) We need to create file with extension .c

`Filename.c`

2) Pre-processing

- Removes comments
- Expands macros
- Expands header file
- Handles conditional compilation
- O/P file : filename.i

3) Compiling

- Converts filename.i into assembly code
- O/P file : filename.s

4) Assembling

- Converts assembly code into m/c code
- O/P file : filename.o.
- Functions call are not yet resolved.

5) Linking

- Links function calls with their defn.
- Adds Startup & required s/m code
- Produces final executable file.

Types of Linking :

- Static Linking : All the code copied into one executable code.
- Dynamic Linking : Shared libraries are linked during execution.

Q. 2)

a). Define Data type. Explain primitive data types supported in C language with example.

A: Data type :

It is classification that specifies which type of value a variable can hold & what operations can be performed on it.
It determines the memory size allocated to the variable.

Primitive Data types in C

a) Integer (int) : Used to store whole numbers without decimals.
Ex: int age = 20;

b) Character (char) : Used to store a single character. It is enclosed in single quotes.
char grade = 'A';

c) Floating^{Point} (float): Used to store real numbers with single precision decimal points.

Ex: float price = 99.9;

d) Double (double): Used for storing large floating point numbers with double precision.

Ex: double distance = 12345.6789;

e) void: Represents the absence of a value or type, usually used with functions to indicate they do not return anything.

Q.2)

b) Define Operators. Explain the Increment & Decrement operators with suitable examples.

A: Operators are symbols or special characters used in programming languages to perform operations on variables & values.

Increment & Decrement Operators

These are unary operators that increase/decrease the value of a var by 1.

- Increment operator (++) : Increases the value of a variable by 1
- Decrement operator (--) : Decreases the value of a variable by 1

They can be used in two forms:

- Prefix form (++x or --x) : The variable is incremented or decremented first, then the value is used.
- Postfix form (x++ or x--) : The current value of the variable is used first, then it is incremented/decremented.

Ex:

int x = 5;

int a = ++x;

int b = x++;

int y = 5;

int c = --y;

int d = y--;

C) Show the evaluation of the following expressions with intermediate & final values.

i) $x = a - b/3 + c * 2 - 1$ when $a = 9, b = 12, c = 3$

ii) $10! = 10!!5 < 4 \& 8$.

i) $x = a - b/3 + c * 2 - 1$

Solⁿ Step: 1)
Substitute $a = 9, b = 12, c = 3$

$$\begin{aligned}x &= a - b/3 + c * 2 - 1 \\ &= 9 - (12/3) + (3 * 2) - 1\end{aligned}$$

Step: 2)

Compute division & multiplication

$$* 12/3 = 4$$

$$* 3 * 2 = 6$$

Now expression

$$x = 9 - 4 + 6 - 1$$

Step: 3)

Compute addition & subtraction (left to right)

$$* 9 - 4 = 5$$

$$* 5 + 6 = 11$$

$$~~6 - 1 = 5~~$$

$$* 11 - 1 = 10$$

ii)

$$10 \& 8 = 10 \& 8 < 4 \& 8$$

2) Evaluate Relational operators:

$$10 \& 8 = 10 \rightarrow 0 \text{ (false)}$$

$$5 < 4 \rightarrow 0 \text{ (false)}$$

∴ Expression is now,

$$0 \& 8$$

d) Develop a C program to multiply, subtract and division by taking two whole numbers. Choose suitable data types for variables.

A:

```
#include <stdio.h>
```

```
int main()
```

```
{
```

```
int n1, n2;
```

```
int sub, mult;
```

```
float div;
```

```
printf("Enter two whole numbers:");
```

```
scanf("%d %d", &n1, &n2);
```

```
sub = n1 - n2;
```

```
mult = n1 * n2;
```

```
if (n2 != 0)
```

```
div = (float) n1 / n2;
```

```
else
```

```
printf("Div by zero not possible | n");
```

```
printf("Subtraction: %d | n", sub);
```

```
printf("Multiplication: %d | n", mult);
```

```
if (num2 != 0)
```

```
printf("Div: %2f | n", div);
```

```
return 0;
```

```
}
```

Module - 2

Q. 3)

a) Explain the Reading and Writing characters.

A: In C, characters are read & written using std I/O functions

Reading character

-> get char () Reads the single character from keyboard

-> scanf ("%c", &ch) Reads a character.

Writing character

-> put char () - Displays a single character.

-> printf ("%c", ch) - prints a character

Ex: #include <stdio.h>

int main ()

{

char ch ;

printf ("Enter a character : ");

ch = getchar ();

printf (" you entered : ");

putchar (ch);

return 0 ;

}

b) With a suitable example, explain formatted i/p & o/p statements

A: Formatted I/O allows data to be read or printed in a specific format

scanf () - Formatted input

printf () - Formatted output

Common format specifiers

%d - Integer

%f - float

%c - character

%s - string

Ex:

```
#include <stdio.h>
int main ( )
{
    int roll;
    float marks;
    printf ("Enter roll number and marks:");
    scanf ("%d %f", &roll, &marks);
    printf ("Roll NO: %d\n", roll);
    printf ("Marks: %f\n", marks);
    return 0;
}
```

C). List the conditional branching statement in C. Explain any two

A: Conditional Branching Statements

- 1) if
- 2) if-else
- 3) else-if ladder
- 4) switch
- 5) Conditional operator ? :

2) if-else

Syntax :

```
{ if (condition)
```

```
} = body of if
```

```
{ else
```

```
} = body of else
```

The if-else statement is used to execute one block of code when the condition is true & another block when it is false. It helps in making decision based on a given condition.

Ex:

```
#include <stdio.h>
int main()
{
    int num;
    printf("Enter a number: ");
    scanf("%d", &num);
    if (num % 2 == 0)
        printf("Even number");
    else
        printf("Odd number");
    return 0;
}
```

4). Switch :-

Syntax:

```
switch (expression)
{
    case value 1:
        // Statement
        break;
    case value 2:
        // Statement
        break;
    default:
        // default statements
}
```

The switch statement is used to select one block of code from multiple options based on the value of an expression. It compares the expression with different case values & executes the matching case.

Ex:

```
#include <stdio.h>
int main()
{
    int day;
    printf("Enter a day (1-3):");
    scanf("%d", &day);
    switch(day)
    {
        case 1:
            printf("Monday");
            break;
        case 2:
            printf("Tuesday");
            break;
        case 3:
            printf("Wednesday");
            break;
        default:
            printf("Invalid day");
    }
    return 0;
}
```

d) Develop a C program to print Floyd's Δ^k for N rows ($N > 0$) choose suitable control statement [for $n = 4$]

```
1
2 3
4 5 6
7 8 9 10
```

```
#include <stdio.h>
int main()
{
    int n, i, j, num = 1;
    printf("Enter a number of rows:");
}
```

```

scanf("%d", &n);
for (i=1; i<=n; i++)
{
    for (j=1; j<=i; j++)
    {
        printf("%d", num);
        num++;
    }
    printf("\n");
}
return 0;
}

```

Output :-

Enter number of rows : 4

```

1
2 3
4 5 6
7 8 9 10

```

Q.4)

a) Explain the iteration statements with Example.

Iteration statements are used to execute a block of code repeatedly until a condition becomes false

Types:

1. for
2. while
3. do-while

Ex:

```
for(int i=1; i<=5; i++)  
{  
    printf("e.d", i);  
}
```

Ex:

```
int i=1;  
while (i<=5)  
{  
    printf("e.d", i);  
    i++;  
}
```

b)

i) break :

Terminates the loop or switch statement immediately.

Ex:

```
for(int i=1; i<=5; i++)  
{  
    if (i==3)  
        break;  
    printf("e.d", i);  
}
```

ii) continue :

Skips the current iteration & continues with the next iteration

```
for (int i=1; i<=5; i++)  
{  
    if (i==3)  
        continue;  
    printf("i.d", i);  
}
```

C)

goto :

Transfers control to a labeled statement

```
goto label;  
label:  
printf("Hello");
```

return :

Exits from a function & returns value.

```
return 0;
```

Block Statement :

Group of statements enclosed in { }

```
{  
    int a = 10;  
    printf("i.d", a);  
}
```

d)

Quadratic Equation

$$D = b^2 - 4ac$$

```
#include <stdio.h>
#include <math.h>
int main (C)
{
    float a, b, c, D, root1, root2;
    printf ("Enter a, b, c: ");
    scanf ("%f %f %f", &a, &b, &c);

    D = b*b - 4*a*c;

    if (D > 0)
    {
        root1 = (-b + sqrt(D)) / (2*a);
        root2 = (-b - sqrt(D)) / (2*a);
        printf ("Roots are real and different |n");
    }
    else if (D == 0)
    {
        root1 = root2 = -b / (2*a);
        printf ("Roots are real & equal |n");
    }
    else
    {
        printf ("Roots are imaginary |n");
    }
    return 0;
}
```

Module - 3

Q.5 >

a)

Define Array & Declaration

Array : Collection of same data type elements stored in contiguous memory location.

1D Array

```
int a[5] = {1, 2, 3, 4, 5};
```

2D Array

```
int b[2][2] = {{1, 2}, {3, 4}};
```

b)

Passing Array to functions

Arrays are passed by reference (address is passed)

```
void display (int arr[], int n)
{
    for (int i=0; i<n; i++)
        printf ("%d", arr[i]);
}
```

call:

```
int a[3] = {1, 2, 3};  
display(a, 3);
```

c)

Variable Length Array [VLA]

Array whose size is decided at runtime

```
int n;  
scanf("%d", &n);  
int arr[n];
```

Difference

Static Array → size is fixed at compile time.

VLA → size decided at runtime.

d)

Transpose of Matrix

```
#include <stdio.h>  
int main()  
{
```

```
    int a[2][2], i, j;
```

```
    printf("Enter a matrix:");
```

```
    for (i=0; i<2; i++)
```

```
        for (j=0; j<2; j++)
```

```

scanf ("%d", &a[i][j]);
printf ("Transpose:\n");
for (i=0; i<2; i++)
{
    for (j=0; j<2; j++)
        printf ("%d", a[j][i]);
    printf ("\n");
}
return 0;
}

```

Q.6)
a)

Pointer

variable that stores address of another variable

Declaration:

```
int *p;
```

Initialization:

```
int a = 10;
```

```
p = &a;
```

Access array using pointer:

```
int arr [3] = { 1, 2, 3 }
```

```
int *p = arr;
```

```
printf ("%d", *(p+1));
```

b)

Two Pointer Operators

- 1) & → Address operator.
- 2) * → ~~Def~~ Dereference operator.

Ex:

```
int a = 10;  
int *p = &a;  
printf("%d", *p);
```

c) Multiple Indirection

Pointer to pointer

```
int a = 10;  
int *p = &a;  
int **q = &p;  
printf("%d", **q);
```

d)

Add two numbers using pointers

```
#include <stdio.h>
int main()
{
    int a=5, b=10, sum;
    int *p=&a, *q=&b;

    sum = *p + *q;
    printf ("sum = %d", sum);
    return 0;
}
```

Module-4

Q.7)

a)

Function Definition & Declaration

Function: Block of code that performs a specific task

Declaration

```
int add (int, int);
```

Definition:

```
{ int add (int a, int b)
{ return a+b; }
```

b) Function Arguments & Return

Arguments :

Value passed to function

Return :

Sends value back to calling function

```
int sum(int a, int b)
{
    return a+b;
}
```

c) Function Prototype

Function prototype declares function before main().

Ex:

```
int add(int, int);
int main()
{
    int S = add(2, 3);
}
```

d)

Recursion - Factorial

Recursion : Function calling itself

```
int fact (int n)
{
    if (n == 0)
        return 1;
    return n * fact (n-1);
}
```

Q.8)
a)

Dynamic Memory Allocation

Memory allocated at runtime using

- 1) malloc ()
- 2) calloc ()
- 3) realloc ()
- 4) free ()

Ex :

```
int * p = (int *) malloc (5 * size of (int));
free (p);
```

b) Advantages of functions

- 1) Code of Reusability
- 2) Reduce duplication
- 3) Easy debugging
- 4) Improves readability
- 5) Modular programming.

c)

Two parameter passing Techniques

- 1). Call by value

Copy of value passed

```
void fun (int a)
```

```
{
```

```
    a = 20;
```

```
}
```

- 2) Call by Reference

Address passed using pointer

```
void fun (int *a)
```

```
{
```

```
    *a = 20;
```

```
}
```

d) Prime or not

```
#include <stdio.h>
```

```
int n, i, flag = 0;
```

```
printf ("Enter a positive integer : ");
```

```
scanf ("%d", &n);
```

```
if (n == 0 || n == 1)
```

```
    flag = 1;
```

```
for (i = 2; i <= n/2; i++)
```

```
{
```

```
    if (n % i == 0)
```

```
    {
```

```
        flag = 1;
```

```
        break;
```

```
    }
```

```
}
```

```
if (flag == 0)
```

```
    printf ("%d is a prime number.", n);
```

```
else
```

```
    printf ("%d is not a prime number.", n);
```

```
return 0;
```

```
}
```

Module - 5

Q.9)

a)

Structure :

A structure in a C is a user-defined data type used to group variables of different data types under a single name.

Types of Structure declaration :

1) Structure declaration only

```
struct Student
{
    int roll;
    char name[20];
};
```

2) Structure with variables

```
struct Student
{
    int roll;
    char name[20];
} s1, s2;
```

3) Using typedef

```
typedef struct
{
    int roll;
    char name[20];
} Student;

Student s1;
```

b) Passing Array of Structures to a function

An array of structure is passed to a function by passing its name

Ex:

```
struct Student
{
    int roll;
    char name[20];
};
```

```
void display (struct Student S[], int n)
{
    for (int i=0; i<n; i++)
        printf (" %d %s \n", S[i].roll, S[i].name);
}
```

Call :

```
struct Student S[2];
display (S, 2);
```

C)

Structure v/s Union

Structure	Union
1) Memory allocated for all members	Memory shared by all members
2) Size = Sum of all members	Size = Size of largest member.
3) All members can be used simultaneously	Only one member used at a time
4) Use more memory	Equal memory

d)

Program to store and display Employee details

```
#include <stdio.h>
```

```
struct Employee
```

```
{
```

```
    int id;
```

```
    char name[20];
```

```
    float Salary;
```

```
};
```

```
int main()
```

```
{
```

```
    struct Employee e;
```

```
    printf("Enter ID, Name, Salary:");
```

```
    scanf("%d %s %f", &e.id, &e.name, &e.salary);
```

```
    printf("\n Employee Details : \n");
```

```
    printf("ID: %d \n name: %s \n salary: %f", e.id, e.name,  
           e.salary);
```

```
    return 0;
```

```
}
```

Q.10

a)

Compare two Structure variables

Structures cannot be compared directly using `==`.
Each member must be compared individually

Ex:

```
struct Student
{
    int roll;
    int marks;
};
```

```
struct Student s1 = {1, 90};
```

```
struct Student s2 = {1, 90};
```

```
if (s1.roll == s2.roll && s1.marks == s2.marks)
```

```
    printf ("Structures are equal");
```

```
else
```

```
    printf ("Not equal");
```

b)

Enumerated Data types

Enum is a user-defined data type that all assigns names to integer constants

```
enum Day { MON, TUE, WED, THU, FRI } SAT
```

Ex:

```
#include <stdio.h>

enum Day { MON, TUE, WED };

int main ()
{
    enum Day d;
    d = TUE;
    printf ("value : %d", d);
    return 0;
}
```

C)

Bit - field & typedef

Bit - field :

Used to allocate specific number of bits to structure members

Struct Data

```
{
    unsigned int a : 3;
    unsigned int b : 5;
};
```

typedef :

Creates a new name an existing data type.

```
typedef unsigned int unit;
unit x = 10;
```

d)

Access & Modify Members in Array of Structures

```
#include <stdio.h>

struct Student
{
    int roll;
    int marks;
};

int main()
{
    struct Student S[2];
    for (int i=0; i<2; i++)
    {
        printf ("Enter the roll & marks :");
        scanf ("%d %d", &S[i].roll, &S[i].marks);
    }

    S[0].marks = 95;

    for (int i=0; i<2; i++)
    {
        printf ("%d %d \n", S[i].roll, S[i].marks);
    }
    return 0;
}
```

